ANT+/BLE MODULE ISP130301-ANT



ISP130301-ANT
Dual ANT+™ / BLE Module with Integrated Antenna

Key Features

- ANT / ANT+™ protocols
- Single Mode BLE v4.1
- Proprietary 2.4 GHz protocols
- Based on Nordic Semiconductor nRF51 family
- 2.4GHz low energy RF Transceiver
- 32bit ARM Cortex M0 CPU with 256kB Flash
- Analog and Digital peripherals
- Ultra Low Power Consumption
- Single 2.1 to 3.6 V supply
- Very small size 8.0 x 11.0 x 1.2 mm
- Temperature -25 to 75 °C
- Fully integrated RF matching and Antenna
- Integrated 16 MHz and 32.768 kHz Clocks

Certifications

- Complies with FCC, CE, IC and TELEC
- Bluetooth SIG certified
- RoHS compliant

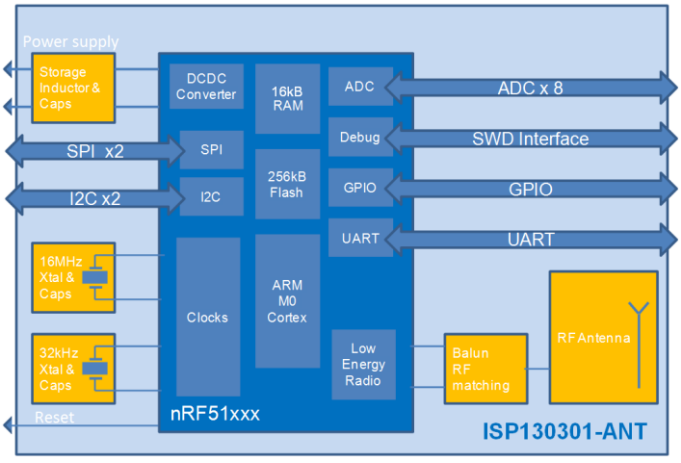

Applications

- Space constrained ANT+ / BLE Devices
- Sport and fitness sensors
- Health care sensors
- Out of Range (OOR) sensors
- Personal User Interface Devices (PUID)
- Remote controls

General Description

This module is based on nRF51422 Nordic Semiconductor 2.4GHz wireless System on Chip (SoC) integrating a 2.4 GHz transceiver, a 32 bit ARM Cortex™-M0 CPU, a flash memory, and analog and digital peripherals. It can support ANT / ANT+™, Bluetooth® Low Energy and 2.4GHz proprietary ultra low-power wireless protocols.

Fully qualified BLE stacks for nRF51422 are implemented in the S100 series of SoftDevices which can be freely downloaded. nRF51 platform also provides extensive software support for ANT applications with S210 SoftDevices and dual ANT/BLE stack S310 SoftDevices. ISP130301-ANT can then be used for ANT applications, as well as Master and Slave modes for BLE, or proprietary protocols on request.

The module is designed for ultra low power applications such as sports and wellness sensors. Advanced power management enables battery lifetimes up to several years on a coin cell battery. Even though its very small size 8 x 11 x 1.2 mm, the module integrates the wireless SoC, load and decoupling capacitors, 16 MHz and 32 kHz crystals, DC-DC converter, RF matching circuit and antenna.

The module forms a standalone ANT / ANT+ / BLE node for which only the addition of a suitable DC power source and appropriate sensor is necessary for sensor applications. As the module has several end applications, the antenna was designed to be compatible with several ground plane sizes such as USB dongle or cell phone.

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.

Distributed by: TEXIM EUROPE www.texim-europe.com

Contents

1. Electrical Specifications ..... Page 1-2
2. RF Performances ..... Page 1-6
3. Product Development Tools ..... Page 1-9
4. Mechanical Outlines ..... Page 1-10
5. Storage & Soldering Information ..... Page 1-13
6. Quality & User Information ..... Page 1-14

1. Electrical Specifications

Electrical Performance

The specifications of the module follow those of the nRF51822. The following high level parameters are given for the module.

The operating temperature range is -25 to +75 °C with the following performances.

Parameter	Value	Unit
Supply voltage		
Supply Voltage	2.1 to 3.6	V
Current consumption		
Static levels		
Peak current, receiver active (supply at 2.1V)	12.6	mA
Peak current, transmitter active +4 dBm Output Power	16	mA
Peak current, transmitter active 0 dBm Output Power	10.5	mA
Current drain, connection-less state	0.5	µA
Current drain between connection events	2.3	µA

Pin Assignment

The module uses an LGA format with a double row of pads on a 0.65 mm pitch. The pad layout follows the QFN Jedec standard for 2 row LGA parts.

Pads 1 thru 56 are signal pins 0.4 x 0.4 mm, Pad 57 is an exposed metal pad that is connected to ground. The NC pads are 0.8 x 0.8 or 0.4 x 0.4 mm and are to be connected to isolated metal pads on the application PCB for mechanical stability and reliability (drop test).

The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.
Distributed by: TEXIM EUROPE www.texim-europe.com

Pin	Name	Pin function	Description
1	P0_07	Digital I/O	General purpose I/O pin
2	NC	Not Connected	Isolated pad on application PCB for mechanical stability
3	P0_09	Digital I/O	General purpose I/O pin
4	NC	Not Connected	Isolated pad on application PCB for mechanical stability
5	P0_13	Digital I/O	General purpose I/O pin
6	NC	Not Connected	Isolated pad on application PCB for mechanical stability
7	P0_19	Digital I/O	General purpose I/O pin
8	NC	Not Connected	Isolated pad on application PCB for mechanical stability
9	P0_17	Digital I/O	General purpose I/O pin
10	NC	Not Connected	Isolated pad on application PCB for mechanical stability
11	P0_20	Digital I/O	General purpose I/O pin
12	VSS	Ground	Should be connected to ground plane on application PCB
13	NC	Not Connected	Isolated pad on application PCB for mechanical stability
14	VSS	Ground	Should be connected to ground plane on application PCB
15	NC	Not Connected	Isolated pad on application PCB for mechanical stability
16	VSS	Ground	Should be connected to ground plane on application PCB
17	NC	Not Connected	Isolated pad on application PCB for mechanical stability
18	VSS	Ground	Should be connected to ground plane on application PCB
19	NC	Not Connected	Isolated pad on application PCB for mechanical stability
20	VSS	Ground	Should be connected to ground plane on application PCB
21	NC	Not Connected	Isolated pad on application PCB for mechanical stability
22	VSS	Ground	Should be connected to ground plane on application PCB
23	VSS	Ground	Should be connected to ground plane on application PCB
24	OUT_MOD	Module I/O	This pin is the RF I/O pin of the BLE module. It should be connected to Pin 26 OUT_ANT for normal operation. During certification the pin may be connected via to an RF connector for module measurement using a Bluetooth test setup.
25	VDD_PA	PA supply	PA supply indicates Transmit mode (Active High)
26	OUT_ANT	Antenna I/O	This pin is connected to the internal antenna. It should be connected to Pin 24 OUT_MOD for normal operation. During certification the pin may be connected to an RF connector for antenna measurement
27	VSS	Ground	Should be connected to ground plane on application PCB
28	VSS	Ground	Should be connected to ground plane on application PCB
29	VCC_nRF	Power	Power supply (2.1 – 3.6V). VDD in nRF51822 doc.
30	VSS	Ground	Should be connected to ground plane on application PCB
31	SWDCLK	Digital Output	HW debug and flash programming I/O
32	P0_18	Digital I/O	General purpose I/O pin
33	SWDIO-nRESET	Digital I/O	System reset (active low). Also HW debug and flash programming I/O
34	P0_16	Digital I/O	General purpose I/O pin
35	P0_15	Digital I/O	General purpose I/O pin
36	P0_14	Digital I/O	General purpose I/O pin
37	P0_12	Digital I/O	General purpose I/O pin
38	P0_10	Digital I/O	General purpose I/O pin
39	P0_11	Digital I/O	General purpose I/O pin
40	P0_05-AIN6	Digital I/O Analog input	General purpose I/O pin ADC input 6

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.

Distributed by: TEXIM EUROPE www.texim-europe.com

Pin	Name	Pin function	Description
41	P0_06-AIN7-AREF1	Digital I/O Analog input Analog input	General purpose I/O pin ADC input 7 ADC Reference voltage
42	P0_03-AIN4	Digital I/O Analog input	General purpose I/O pin ADC input 4
43	P0_04-AIN5	Digital I/O Analog input	General purpose I/O pin ADC input 5
44	P0_01-AIN2	Digital I/O Analog input	General purpose I/O pin ADC input 2
45	P0_31	Digital I/O	General purpose I/O pin
46	P0_02-AIN3	Digital I/O Analog input	General purpose I/O pin ADC input 3
47	P0_30	Digital I/O	General purpose I/O pin
48	P0_00-AREF0	Digital I/O Analog input	General purpose I/O pin ADC Reference voltage
49	P0_29	Digital I/O	General purpose I/O pin
50	P0_28	Digital I/O	General purpose I/O pin
51	P0_24	Digital I/O	General purpose I/O pin
52	P0_23	Digital I/O	General purpose I/O pin
53	P0_21	Digital I/O	General purpose I/O pin
54	P0_22	Digital I/O	General purpose I/O pin
55	P0_25	Digital I/O	General purpose I/O pin
56	P0_08	Digital I/O	General purpose I/O pin
57	GND_EP	Ground	Exposed metal pad. Should be connected to ground plane on application PCB

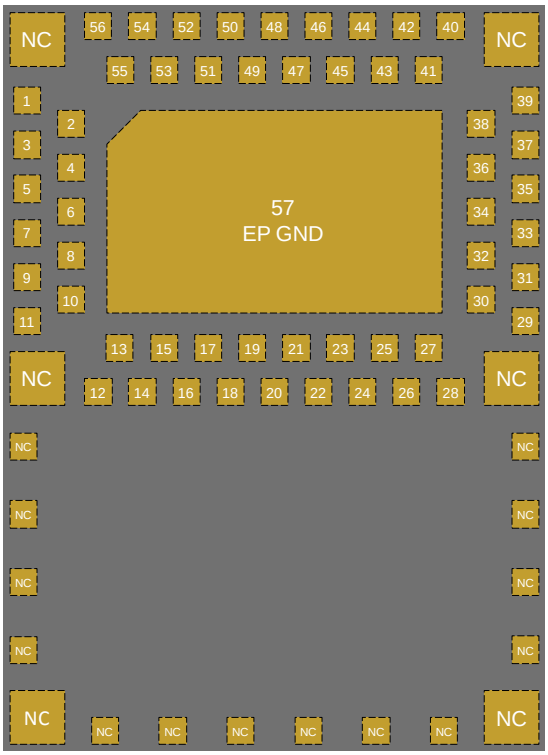

ISP130301-ANT pad placement and pin assignment for the LGA QFN package

TOP VIEW

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.
Distributed by: TEXIM EUROPE www.texim-europe.com

Electrical Schematic

Electrical schematic showing ISP130301 module connections

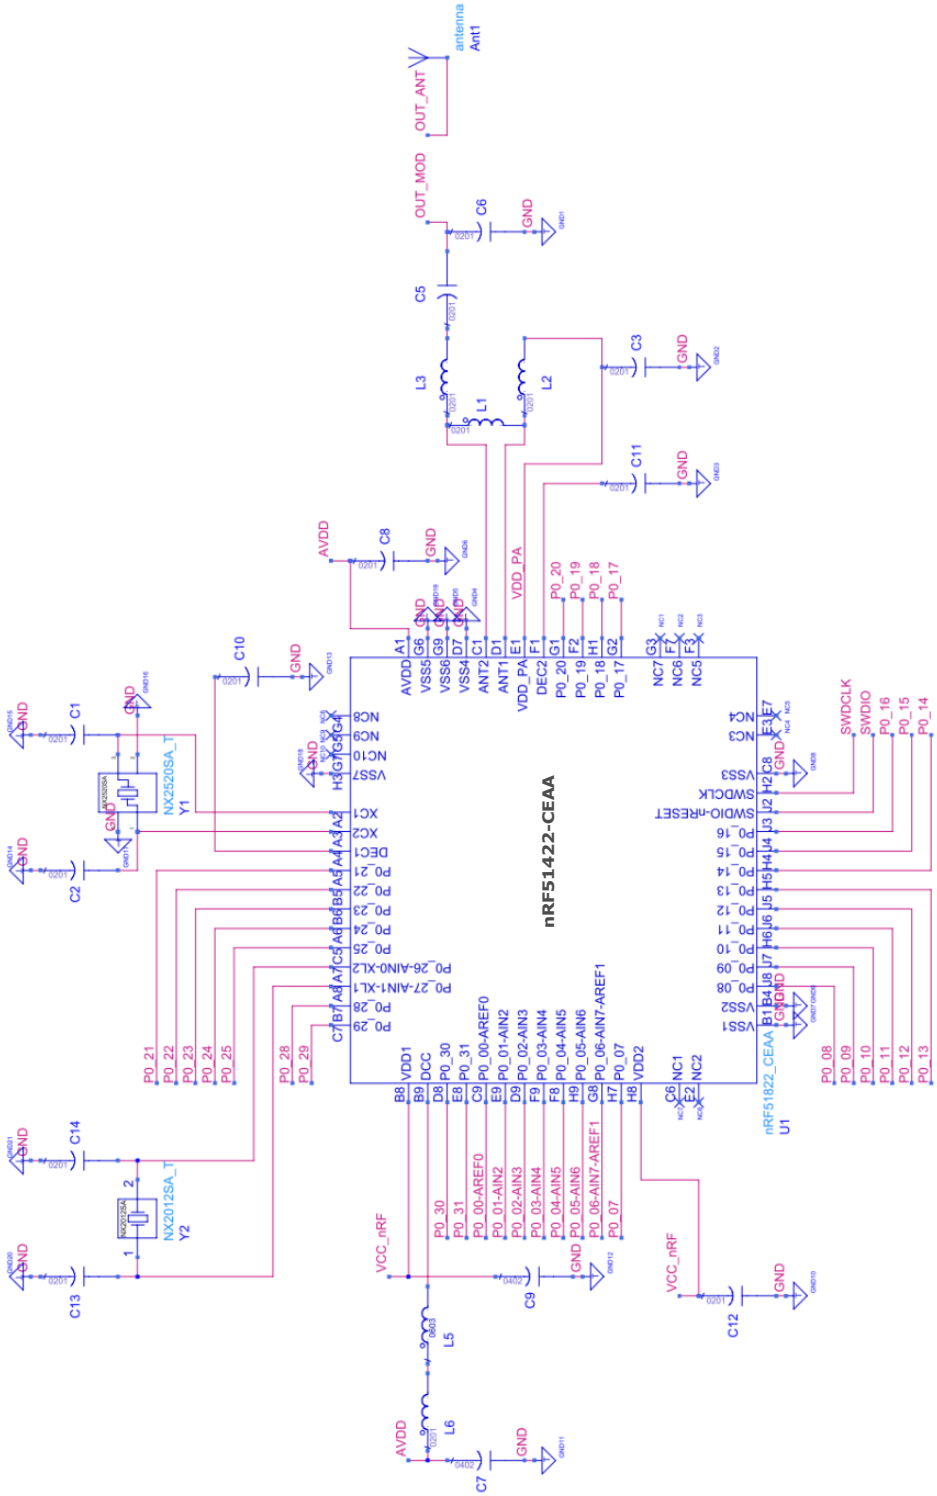

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.

Distributed by: TEXIM EUROPE www.texim-europe.com

2. RF Performances

RF Specifications according to standards

Parameter	Value	Unit	Condition
Output Power	-20 to +4	dBm	Channels 0 to 39
RF Frequency tolerance	Better than +/-20	Hz	Channels 0 to 39
Rx sensitivity BLE mode	-93	dBm	Level for BER <0,1% ideal Tx
Rx sensitivity ANT mode	-90	dBm	Level for BER <0,1% ideal Tx
Max range	> 200	m	Open field @1m height
EIRP	4.6	dBm	
Antenna Gain	0.6	dBi	
Rx sensitivity	51.4	dBµV/m	

Typical Antenna Return Loss

Module mounted on a USB dongle ground plane

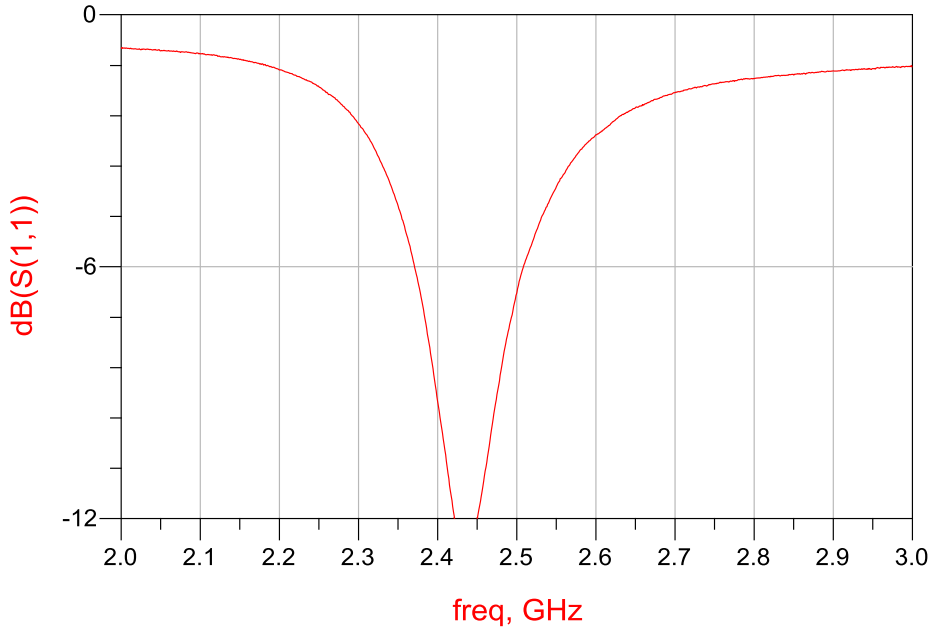

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.

Distributed by: TEXIM EUROPE www.texim-europe.com

Radiation Pattern in 3 planes

Module mounted on a USB dongle ground plane

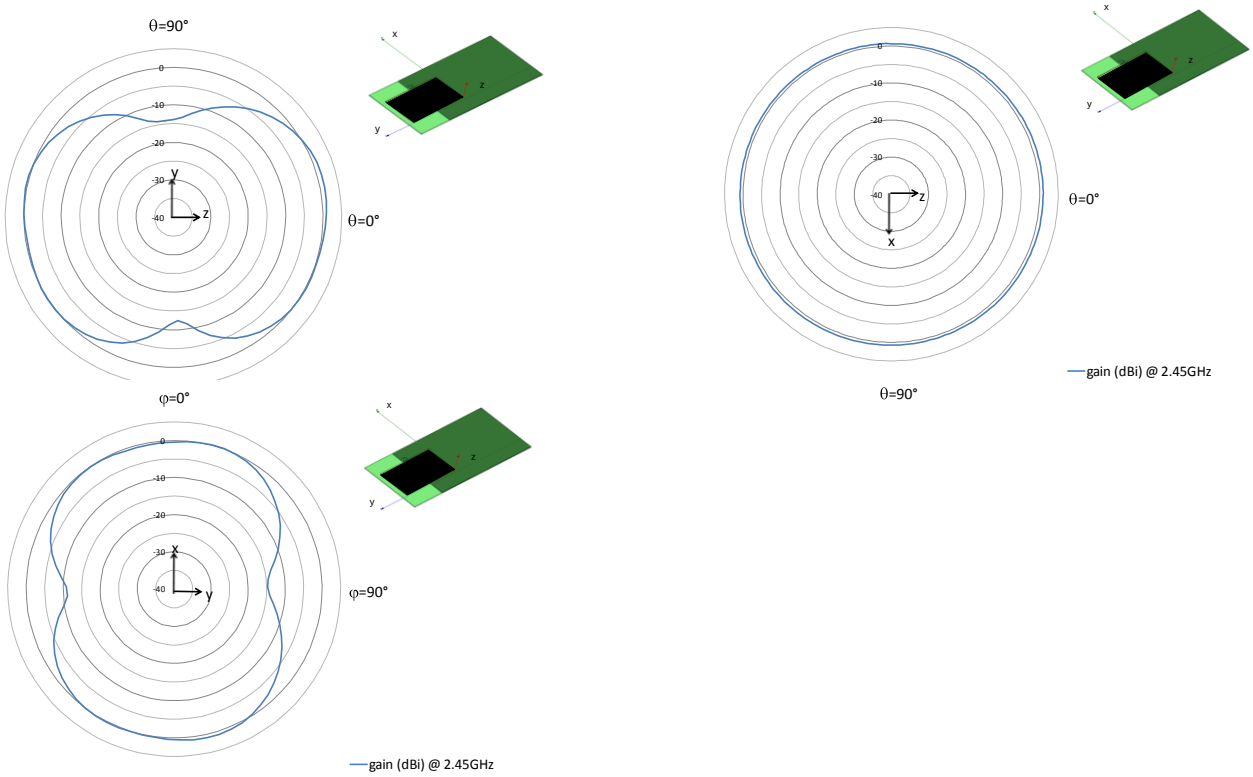

Ground Plane Effect Simulation



USB dongle
ground plane
(size : 18 x 30 mm²)

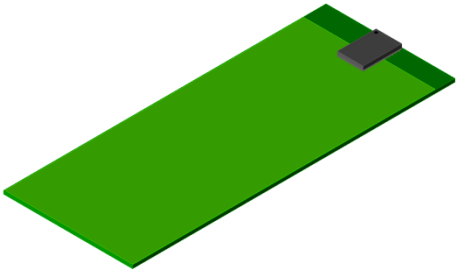

Cell phone config 1
ground plane
(size : 40 x 100 mm²)

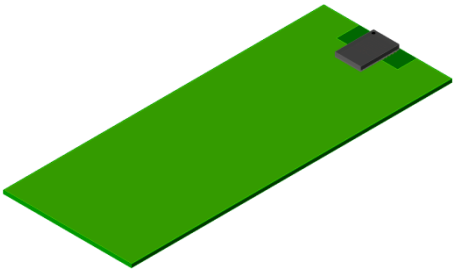

Cell phone config 1 with
side ground plane
(size : 40 x 100 mm²)

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.

Distributed by: TEXIM EUROPE www.texim-europe.com

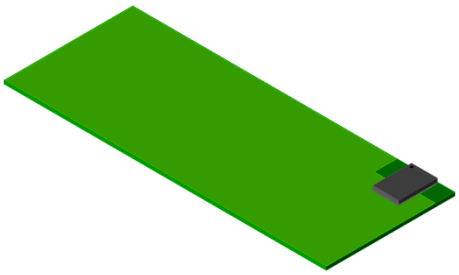

Cell phone config 2 with side ground plane
(size : 40 x 100 mm²)

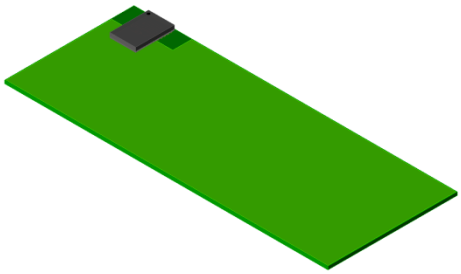

Cell phone config 3 with side ground plane
(size : 40 x 100 mm²)

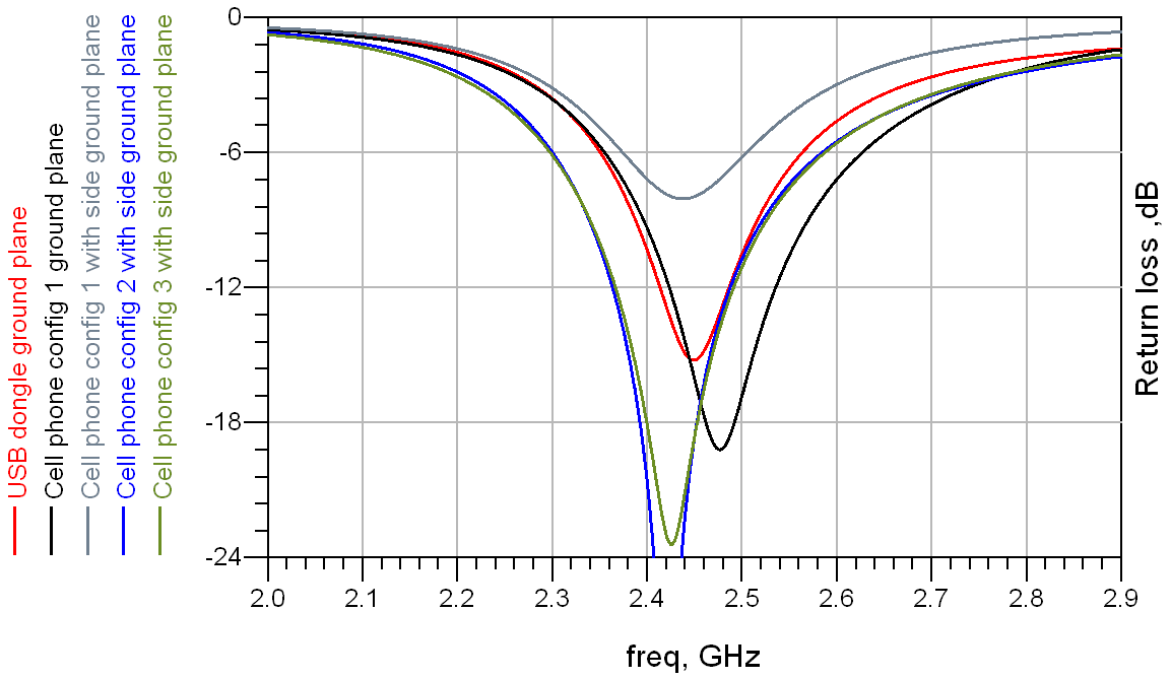

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.
Distributed by: TEXIM EUROPE www.texim-europe.com

3. Product Development Tools

Interface

ISP130301-ANT integrates a full microprocessor interface with up to 32 General Purpose I/O pins (GPIO) and several functions (2 x SPI, 2 x I2C, UART, 8 x ADC, SWDIO interface).

Development Tools and Software

The following development tools and software are recommended for using and testing ISP130301-ANT module:

- Nordic Semiconductor nRFgo Studio (downloadable from www.nordicsemi.com)
- Nordic Semiconductor Master Control Panel (downloadable from www.nordicsemi.com)
- Keil MDK-ARM Lite (downloadable from https://www.keil.com/demo/eval/arm.htm)
- Segger J-Link Lite (downloadable from http://www.segger.com/jlink-software.html)
- S100 series (BLE) nRF51 SoftDevice, S210 (ANT) nRF51 SoftDevice and S310 (ANT/BLE) nRF51 SoftDevice: fully qualified Bluetooth low energy stacks for nRF51422 integrated in ISP130301-ANT module. All SoftDevices (object code, no source) can be downloaded from www.nordicsemi.com.
- nRF51 Software Development Kit (SDK): nRF51 SDK can be downloaded from www.nordicsemi.com. It contains example of source codes applications (C language):
  - Precompiled HEX files
  - Source code
  - Keil ARM project files
  - IAR project files
  - GCC project files

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.
Distributed by: TEXIM EUROPE www.texim-europe.com

4. Mechanical Outlines

Mechanical Dimensions

Dimensional drawing for 8 x 11 x 1.2 mm, 57-Pad LGA Package

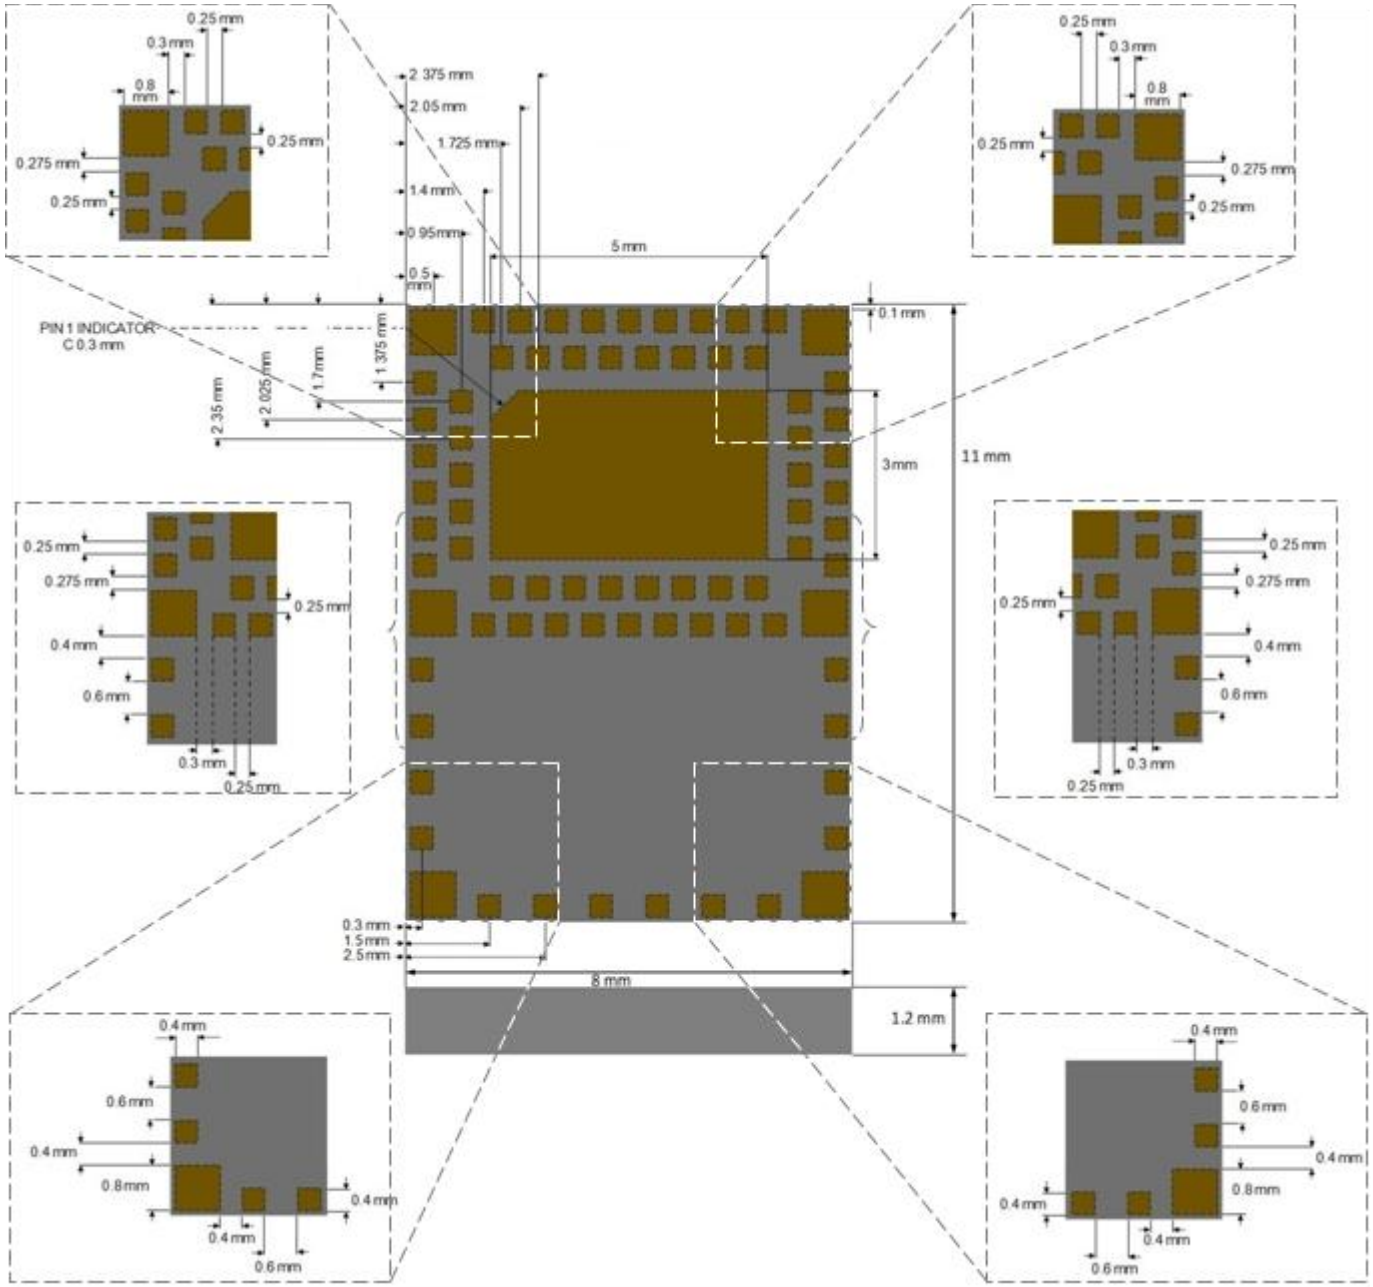

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.
Distributed by: TEXIM EUROPE www.texim-europe.com

SMT Assembly Guidelines

Recommended PCB Land Pattern and Solder Mask layout

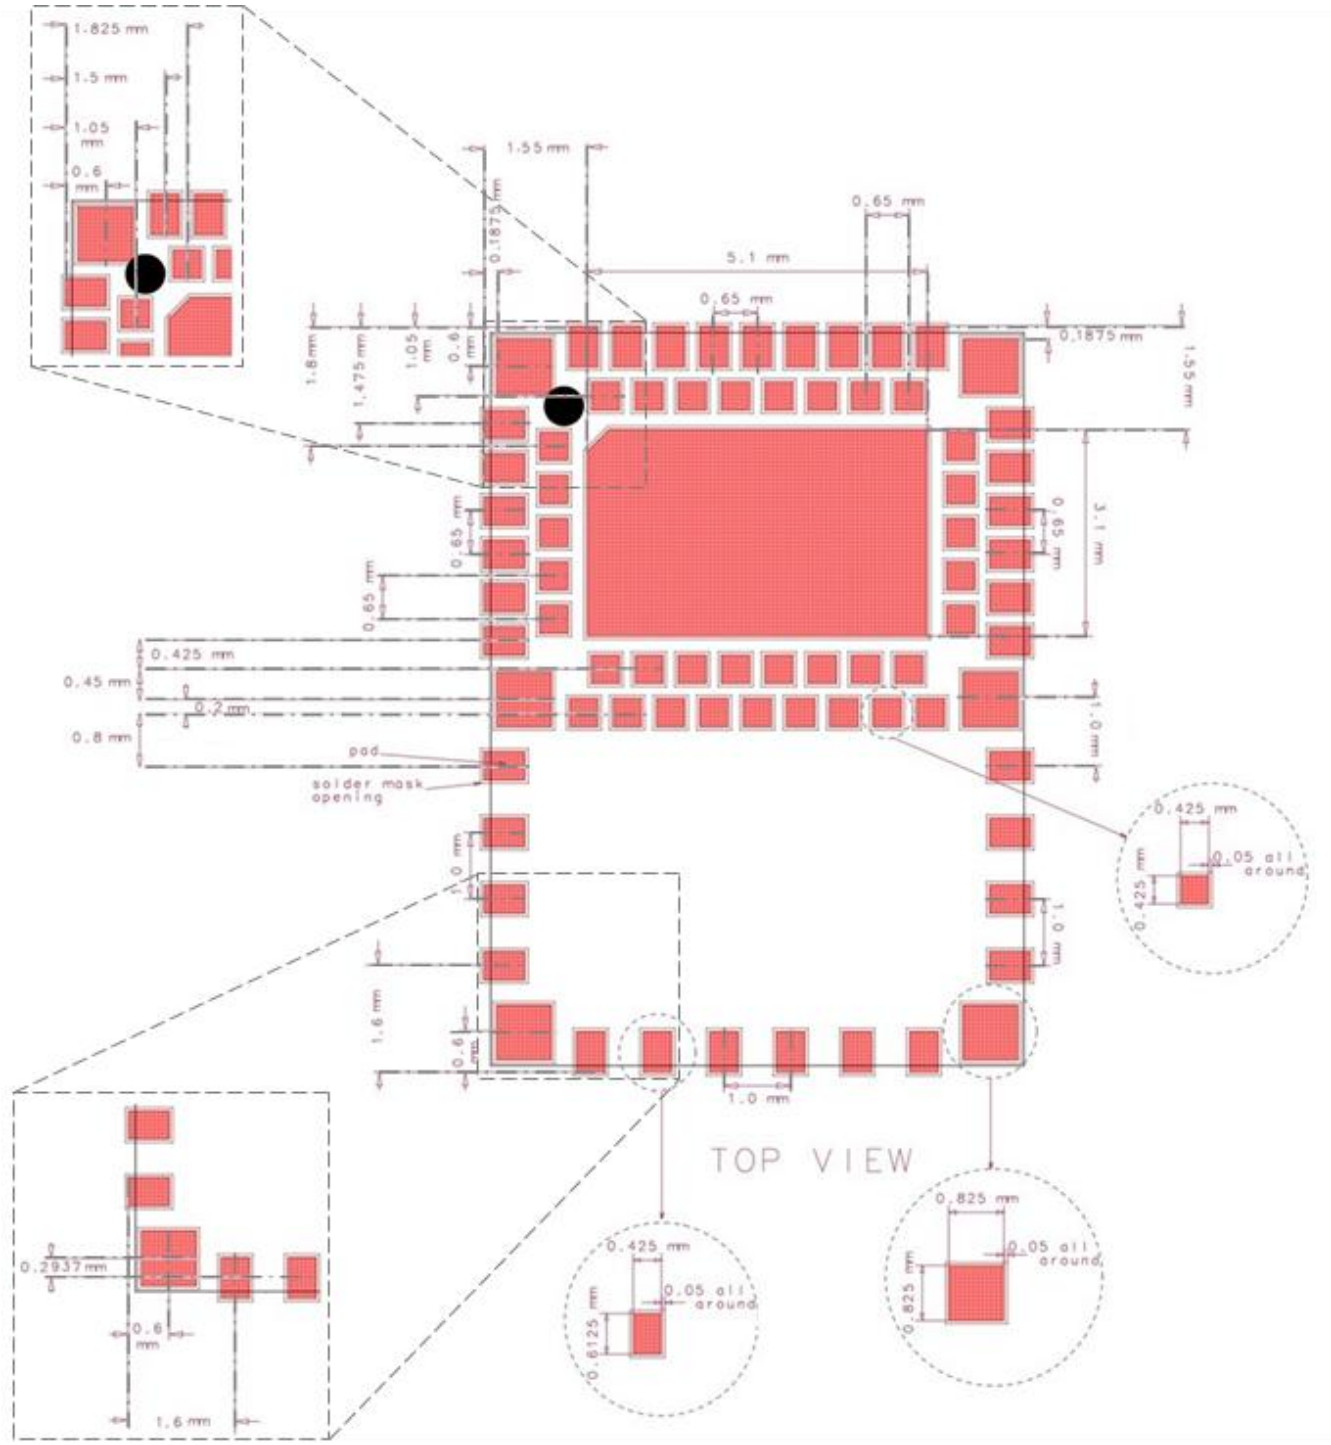

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.
Distributed by: TEXIM EUROPE www.texim-europe.com

Antenna Keep-Out Zone

Recommended metal keep out areas for optimal antenna performance:
no metal, no traces and no components on any layer except mechanical LGA pads.

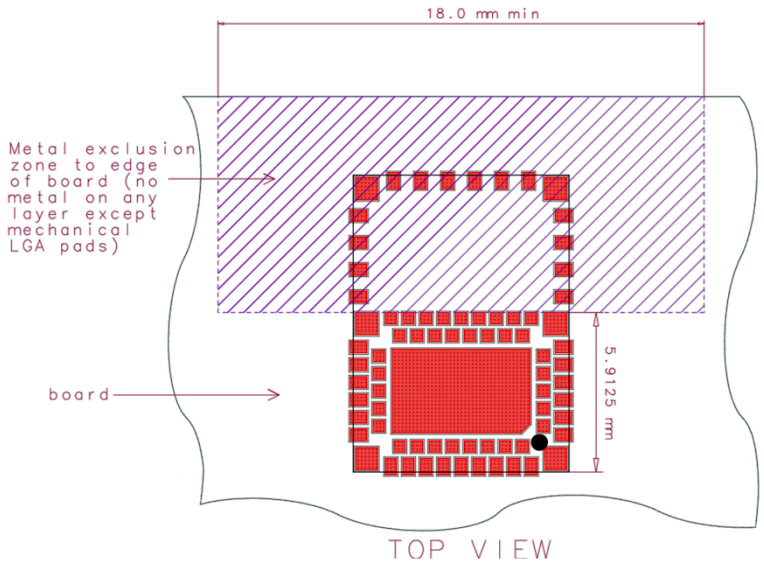

Package marking

I	S	P	1	3	0	3	0	1	C
Y	Y	W	W				A	N	T

ISP130301 ANT	Product number
C	Hardware version
YY	Two digit year number
WW	Two digit week number

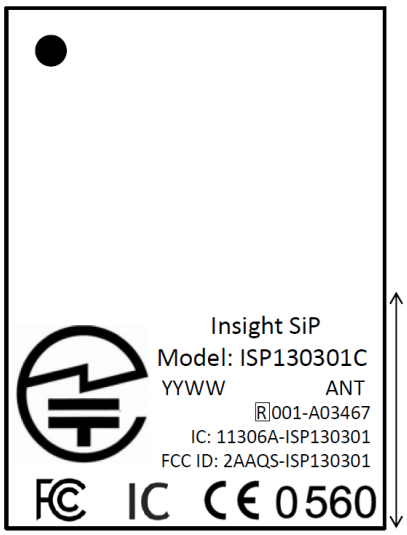

5 mm max for laser marking

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.

Distributed by: TEXIM EUROPE www.texim-europe.com

5. Storage & Soldering information

Moisture Sensitivity

All plastic packages absorb moisture. During typical solder reflow operations when SMDs are mounted onto a PCB, the entire PCB and device population are exposed to a rapid change in ambient temperature. Any absorbed moisture is quickly turned into superheated steam. This sudden change in vapor pressure can cause the package to swell. If the pressure exerted exceeds the flexural strength of the plastic mold compound, then it is possible to crack the package. Even if the package does not crack, interfacial delamination can occur.

Since the device package is sensitive to moisture absorption, it is recommended to bake the product before assembly. The baking process for dry packing is 24 hours at 125°C.

ISP130301 has been tested MSL-5 according to standards. After baking, modules can be exposed to ambient room conditions (approximately 30 °C/60%RH) during 48 hours before assembly on the PCB.

Soldering information

Recommendation for RoHS reflow process is according to Jedec J–STD-020 and 033 standard profiles.

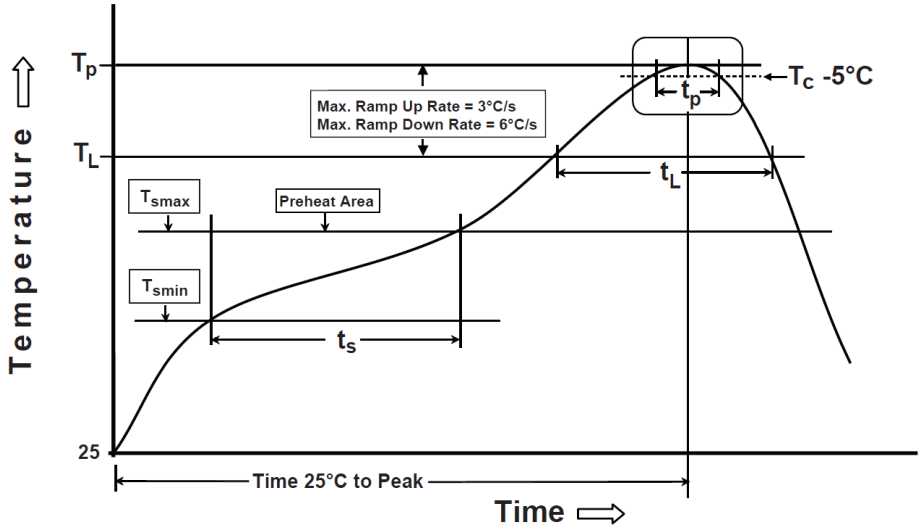

Preheat/Soak Temperature Min (T_{smin}) Temperature Max (T_{smax}) Time (t_s) from (T_{smin} to T_{smax})	 150 °C 200 °C 60-120 sec
Ramp-up rate (T_L to T_p)	3 °C/sec max
Liquidous temperature (T_L) Time (t_L) maintained above T_L	217 °C 60-150 sec

Peak package body temperature (T_p)	260°C (+0/-5°C)
Classification Temperature (T_c) Time (t_p) maintained above T_C-5 °C	260 °C 30 sec
Ramp-down rate (T_p to T_L)	6 °C/sec max
Time 25 °C to peak temperature	8 mn max

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.
Distributed by: TEXIM EUROPE www.texim-europe.com

6. Quality & User information

Certifications

- FCC Identifier 2AAQS-ISP130301 – Certificate N° 142180643/AA/00
- CE: Complies with 1999/5/EC, EN300328 V1.8.1, Statement N° 142140199/AA/00
- IC Certification N° 11306A-ISP130301 – Telefication N° 142170180/AA/00
- TELEC certification N° 001 – A03467
- Bluetooth SIG certified N° D024444
- RoHS compliant

USA – User information

This intends to inform how to specify the FCC ID of our module “ISP130301” on the product. Based on the Public Notice from FCC, the host device should have a label which indicates that it contains our module. The label should use wording such as: “Contains FCC ID: 2AAQS-ISP130301”.
Any similar wording that expresses the same meaning may be used.
The label of the host device should also include the below FCC Statement. When it is not possible, this information should be included in the User Manual of the host device:

“This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions.
(1) This device may not cause harmful interference
(2) This device must accept any interference received, including interference that may cause undesired operation.
Caution: Any Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.”

CANADA – User information

This intends to inform how to specify the IC ID of our module “ISP130301” on the product. According to Canadian standards “RSS-210” and “RSS-Gen”, the host device should have a label which indicates that it contains our module.
The label should use wording such as: “Contains IC: 11306A-ISP130301”.
Any similar wording that expresses the same meaning may be used.
The label of the host device should also include the below IC Statement. When it is not possible, this information should be included in the User Manual of the host device:

“This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.”

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.

Distributed by: TEXIM EUROPE www.texim-europe.com

Discontinuity

Normally a product will continue to be manufactured as long as all of the following are true:
- The manufacturing method is still available.
- There are no replacement products.
- There is demand for it in the market.

In case of obsolescence, Insight SiP will follow Jedec Standard JSD-48. A Product Discontinuation Notice (PDN) will be sent to all distributors and made available on our website. After this, the procedure goes as follows:
- Last Order Date will be 6 months after the PDN was published.
- Last Shipment Date will be 6 months after Last Order Date, i.e. 12 months after PDN.

Disclaimer

Insight SiP's products are designed and manufactured for general consumer applications, so testing and use of the product shall be conducted at customer's own risk and responsibility. Please conduct validation and verification and sufficient reliability evaluation of the products in actual condition of mounting and operating environment before commercial shipment of the equipment. Please also pay attention (i) to apply soldering method that don't deteriorate reliability, (ii) to minimize any mechanical vibration, shock, exposure to any static electricity, (iii) not to overstress the product during and after the soldering process.

The products are not designed for use in any application which requires especially high reliability where malfunction of these products can reasonably be expected to result in personal injury or damage to the third party's life, body or property, including and not limited to (i) aircraft equipment, (ii) aerospace equipment, (iii) undersea equipment, (iv) power plant control equipment, (v) medical equipment, (vi) transportation equipment, (vii) traffic signal equipment, (viii) disaster prevention / crime prevention equipment.

The only warranty that Insight SiP provides regarding the products is its conformance to specifications provided in datasheets. Insight SiP hereby disclaims all other warranties regarding the products, express or implied, including without limitation any warranty of fitness for a particular purpose, that they are defect-free, or against infringement of intellectual property rights. Insight SiP customers agree to indemnify and defend Insight SiP against all claims, damages, costs and expenses that may be incurred, including without any limitation, attorney fees and costs, due to the use of products.

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.

Distributed by: TEXIM EUROPE www.texim-europe.com

TEXIM EUROPE

Partner in Electronic Components & Supply Chain Solutions

The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen
Tel: +31 (0)53 573 33 33
Fax: +31 (0)53 573 33 30
nl@texim-europe.com

Denmark

Sdr. Jagtvej 12
DK-2970 Hørsholm
Tel: +45 88 20 26 30
Fax: +45 88 20 26 39
nordic@texim-europe.com

Belgium

Gentsesteenweg 1154-C22
Chaussée de Gand 1154-C22
B-1082 Brussel / Bruxelles
Tel: +32 (0)2 462 01 00
Fax: +32 (0)2 462 01 25
belgium@texim-europe.com

United Kingdom

St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS
Tel: +44 (0)1522 789 555
Fax: +44 (0)845 299 22 26
uk@texim-europe.com

Germany

Bahnhofstrasse 92
D-25451 Quickborn
Tel: +49 (0)4106 627 07-0
Fax: +49 (0)4106 627 07-20
germany@texim-europe.com

Germany

Martin-Kollar-Strasse 9
D-81829 München
Tel: +49 (0)89 436 086-0
Fax: +49 (0)89 436 086-19
germany@texim-europe.com

Austria

Warwitzstrasse 9
A-5020 Salzburg
Tel: +43 (0)662 216026
Fax: +43 (0)662 216026-66
austria@texim-europe.com

Texim Europe B.V.
Elektrostraat 17
NL-7483 PG Haaksbergen
Tel: +31 (0)53 573 33 33
info@texim-europe.com
www.texim-europe.com

TEXIM EUROPE